

Identification of suitable site for urban solid waste disposal using GIS and remote sensing techniques. A case study of Virudhunagar municipality, India

Suresh B.¹, Sivasankar S.²

1-Cognizant Global service private limited, Bangalore.

2- Cognizant Global service private limited, Mangalore.

Sivgisfirst@gmail.com

ABSTRACT

The solid waste materials in cities are the natural outcome of human activities. In most of the cities and municipalities in India, there is a major concern due to the health problems associated with improper disposal of waste. Several factors have to be considered in site selection for waste disposal. Due to the involvement of different parameters, deciding upon a suitable location for waste disposal is very complicated, costly and time consuming. Geographic Information System (GIS) allows users to view, understand, question, interpret and visualize spatial and non-spatial data in many ways that reveals relationships, patterns and trends in the form of maps, reports and charts. The present study details about locating a suitable waste disposal site for Virudhunagar municipality. Selecting a suitable disposal site should adhere to the government safety norms and ensure there is no risk involved to the people or the environment. Factor considered for site selections include natural physical characteristics as well as socioeconomic, ecological and land-use factors. Multi-criteria overlay analysis has been done for solid waste disposal site selection in this study. Geographical Information System (GIS) integrates geographical, geomorphological and other parameters with population and other relevant data in selection of suitable disposal.

Keywords: GIS, remote sensing, solid waste management, multi-criteria, weightage overlay analysis.

1. Introduction

The solid waste materials in cities are the natural outcome of human activities. Most of our cities and municipalities in third world countries like India is a major concern of the government due to the health problems associated with improper disposal of waste. The rapid growth of population and urbanization decreases the non-renewable resources and disposal of waste matter and toxic waste haphazardly are some of the major environmental issues posing threats to the existence of human being. The most common problems associated with improper management of solid waste include diseases transmission, fire hazards, odor nuisance, atmospheric and water pollution, aesthetic nuisance and economic losses (Basagaoglu, H. et.al. 1997). Waste disposing is an important part of waste management system, which requires much attention to avoid environmental pollution. Only major cities have some sort of waste disposal system. In this study we did a research on identifying a suitable site for solid waste disposal in Virudhunagar municipality, Tamil Nadu.

A disposal site must consider all the socio-economic, environmental and land use factors within the city as well as people safety. Geographical Information System (GIS) can analyze the suitable site selection for urban waste disposal considering all the criteria (Multi-criteria Analysis) which will help local governing body as a part of e-governance. The use of GIS in

selection process will reduce the time and enhance the accuracy. The process of solid waste disposal management mainly consists of collection, processing, recycling and disposing. At present, waste disposal in most cities is done in simple form of landfill depositing (Akbari et al., 2008). However finding a good waste disposal area is difficult since land is a scarce resource. An increasing environmental awareness, increasing cost, community and political opposition and public health concerns have made choosing suitable land for landfills quite difficult (Din et al., 2008).

Landfill site is a complex process involving the processing of massive amount of spatial data. Technological development in computer science has introduced geographical information system (GIS) as an innovative tool in landfill process (Kontos et al., 2005). GIS is a digital database management system that is ideal for advances site-selection studies because it can effectively store, retrieve, analyze and display information according to user-defined specifications (Kao and Lin, 1996, Sener, 2004 and Shamshiry et al., 2011). The multi-criteria decision technique that helps to the decision maker to set the priorities and make the best decision by reducing complex evaluations to a series of pair wise comparisons (Casini et al., 2006). This technique can be used in combination with GIS to arrive at optimal solutions in waste disposal area siting process.

2. Study area

Virudhunagar District is situated in the southern portion of Tamil Nadu State. It is bounded on the north by the districts of Madurai and Sivagangai, on the east by the districts of Sivagangai and Ramanathapuram, on the south by the districts of Tuticorin and Tirunelveli and on the west by a portion of Kerala State and the district of Madurai. It has an area of 4432.55 sq. kms. The administrative headquarters is located at Virudhunagar town. The general geographical information of the district is simple and flatted area. Two non-perennial rivers, namely Arjuna River and Vaipar River are flowing in the district and it will be dry during the summer season. Virudhunagar District consists of Seven municipalities are Aruppukkottai, Rajapalayam, Sattur, Sivakasi, Srivilliputhur, Tiruthangal, and Virudhunagar. Virudhunagar town is located at the latitude of 90 35' N and 770 57' E longitude (fig 1). Virudhunagar, earlier known as 'Virudupatti', is situated 45 km southwest of Madurai. It is the headquarters of Virudhunagar District. Virudhunagar is a major trading town and it exports edible oil, cotton, chilli, spices, and cardamom. The river Kowsika flows through the town. Virudhunagar is also well connected by road. Found large population and various commercial activities as a result of all these factors lot of solid waste is generated in the town.

3. Aim and objectives

The study aimed at understanding the current problems of waste disposal in Virudhunagar municipality and suggest best possible site for waste disposal using GIS and remote sensing techniques. The objectives of this study are as follows

1. To examine the various factors affecting the site selection for Virudhunagar municipal solid waste disposal.
2. To select the suitable site as waste disposal ground depending on weightage overlay analysis through GIS and remote sensing application.

Identification of suitable site for urban solid waste disposal using GIS and remote sensing techniques. A case study of Virudhunagar municipality, India
 Suresh B, Sivasankar S.

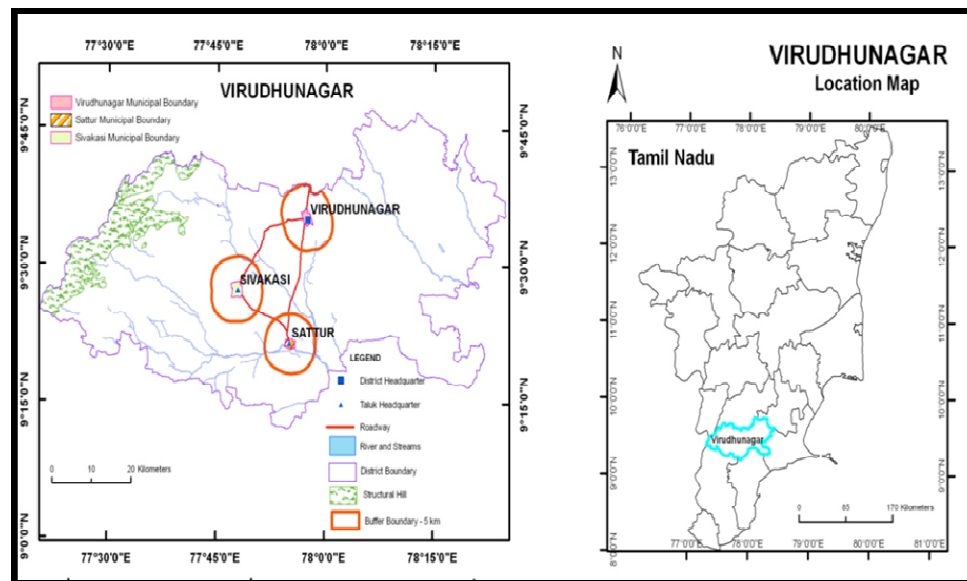


Figure 1: Study area

3.1 Methodology

Solid waste management was certainly an important element in terms of efficiency as profitability for any municipality, particularly in industrialized nations. It's essential complex dimension was resulted, not only of the direct relationship with a number of factors that originate the living standard of a society, but also of our continuously rising consuming lifestyle which analogically enhances the existing operational difficulties (Modak et al., 1996). For present study various data been used such as remote sensing data, geologic data, surface hydrologic data, underground water and meteorological data. In the present investigation information from Quick Bird Imaginary and IRS P6 LISS IV and high-resolution PAN imagery were extracted for the identification of wasteland to be considered for solid waste disposal.

The following are the key thematic layers created for the selection of solid waste disposal sites: -

1. Boundary 5 km buffer
2. Satellite Image
3. Geology
4. Geomorphology
5. Land Use
6. Soil Type
7. Slope
8. Water Level
9. Road network
10. Population around the site in 1km radius.

These thematic layers are then added with a weightage and a corresponding rating value in order to assess their importance to be considered for potential solid waste disposal site. The logical sequence was as follows:

3.1.1 Weighted overlay analysis

Weighted Overlay was a technique for applying a common measurement scale of values to diverse and dissimilar inputs to create an integrated analysis. Geographic problems often require the analysis of many different factors. For instance, choosing the site for a new housing development means assessing such things as land cost, proximity to existing services, slope, and flood frequency. This information exists in different raster layers with different value scales: dollars, distances, degrees, and so on. Each and every key parameter for which we have created a thematic layer will be assigned a weightage value to indicate their importance in taking a decision. The below table shows the weightage given to each parameter.

Table 1: Criteria with Weightages for Municipal Waste Disposal sites

S.No	Criteria	No.	Attribute Measurement	Weightage
1	Accessibility	1	Type of road	50
		2	Distance from collection area	50
2	Receptor	1	Population within 1km	50
		2	Distance to nearest drinking water sources	55
		3	Use of site by nearby resident	25
		4	Distance to nearest building	15
		5	Public utility facility within 2 km	25
		6	Public acceptability	30
3	Environment	1	Critical environment	55
		2	Distance to nearest surface water	55
		3	Depth to ground water	60
		4	Land use	80
4	Geology	1	Geomorphology	90
		2	Geology	90
		3	Soil Type	90
		4	Soil permeability	90
		5	Slope pattern	90
	Total			1000

4. Analysis and results

4.1 Identification of suitable dumping sites

The result of the study include several layers of thematic maps viz., geomorphology, geology, land use/land cover, soil, ground water level, slope etc., These layers were assigned due weightage and ranking so that the right spots for solid waste disposal sites could be identified. All these geo-spatial layers were ranked based on their merits to be identified as a potential

disposal site. Once the weightage and ranking were assigned these layers were ready for a cumulative overlay analysis resulting in the identification of disposal sites. Each thematic layer prepared for the study and the corresponding weighted maps were the potential results leading to the final map of potential disposal site map.

4.2 Geology

Major Geological features observed in Virudhunagar District were Hornblende - biotite gneiss, Fluvial and Sandstone with clay (Fig 3). However the occurrence Charnockite was also significant. The various geology class and their rankings were as follows:

Table 2: Aggregated Classes of Dumping Site Potential with respect to Virudhunagar District

Geology	Rank	Area	Percentage
Charnockite	4	185.8096	4.39
Fluvial	0	413.7302	9.77
Granite, garnet granolite	5	6.4575	0.15
Hornblende - biotite gneiss	1	3207.7078	75.76
Pyroxene Granulite	0	1.0443	0.02
Quartzite	4	1.0901	0.03
Sandstone with clay	3	418.3307	9.88
Total		4234.1702	

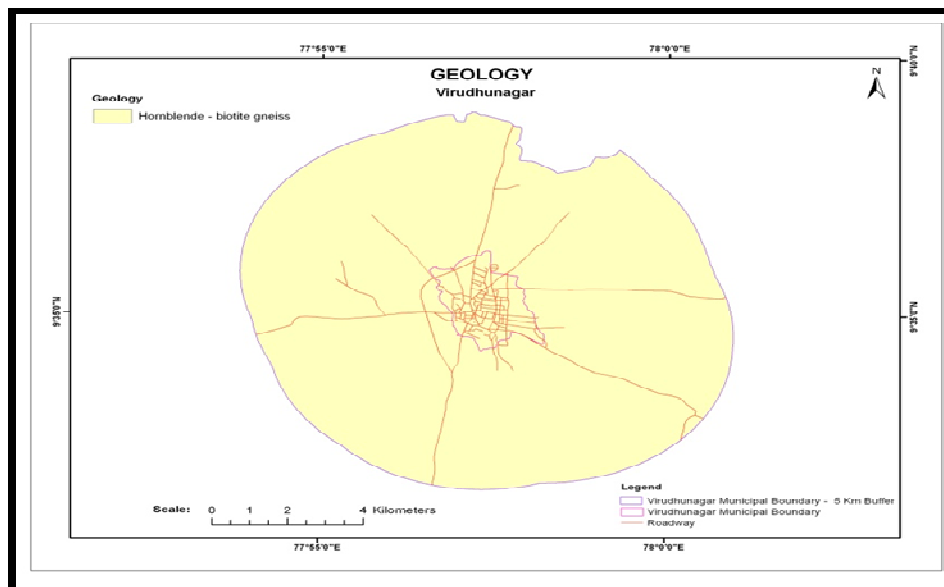


Figure 2: Geology map of Virudhunagar Municipality with 5 km buffer

4.3 Geomorphology

The major Geomorphologic features observed in Virudhunagar District include Alluvial Plain, Alluvial fan Younger, Bazada, Burried Pediment, Flood Plian, Inselberg, Linear Ridge, Mining activity, Moderate Pediment, Pediplain, Residual Hill, Shallow pediment, Structural hill, Upland and Valley fills (Fig. 4). Buried pediments and Residual hills were the highly suitable areas followed by uplands and pediplains for locating suitable disposal sites at Virudhunagar district. The characteristics of these features were elaborated bellow Table 4.3

Table 3: Aggregated Classes of Dumping Site Potential with respect to Virudhunagar District

Geomorphology	RANK	Area	Percentage
Alluvial Plain	0	1.7994	0.04
Alluvial fan Younger	0	6.4665	0.15
Bazada	0	27.8225	0.66
Burried Pediment	6	136.0074	3.21
Flood Plain	0	48.3278	1.14
Inselberg	0	2.2840	0.05
Linear Ridge	0	8.6406	0.20
Mining Activity	0	8.6607	0.20
Moderate Pediment	2	976.1227	23.05
Pediplain	3	713.8550	16.86
Residual Hill	5	7.8687	0.19
Shallow Pediment	1	1916.9445	45.27
Structural Hill	0	236.9451	5.60
Upland	4	129.9950	3.07
Valley fills	0	12.4302	0.29
Total		4234.1701	

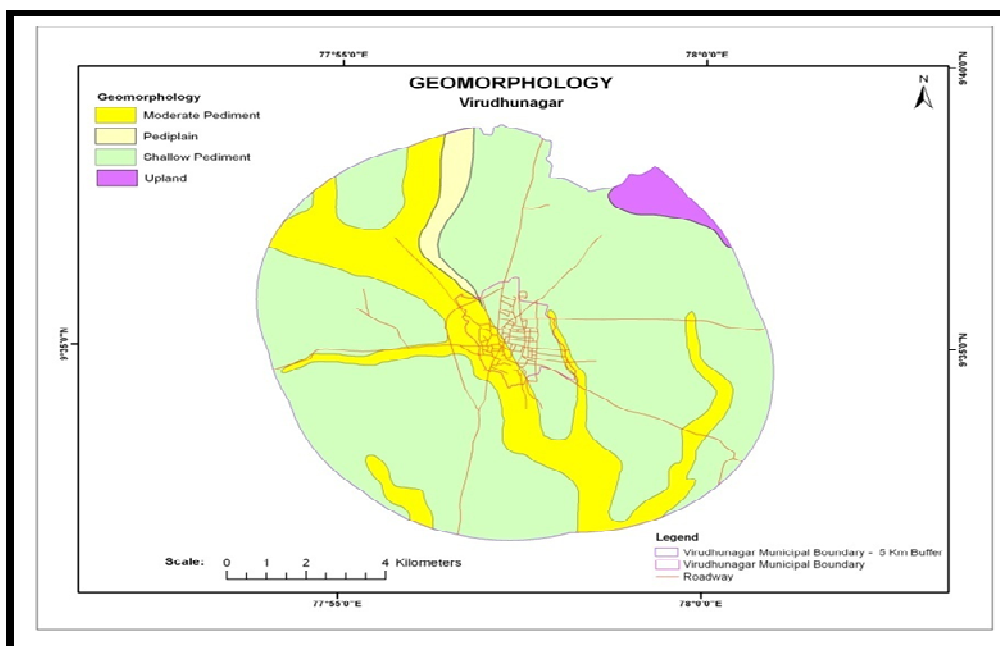


Figure 3: Geomorphology map of Virudhunagar Municipality with 5 km buffer

4.4 Slope

The Slopes in the Virudhunagar District have been classified into 5 classes as per table 4. In general; Virudhunagar has high degree of slope in the western part (around 10° - 15°) as well as on the eastern part of the Virudhunagar District. In all other parts <2 ° to 5 ° -10 ° slope was found. The Virudhunagar municipality was having predominantly < 2 ° slope. High slopes can be seen around the ridges and in and around small hillocks found in this area.

Table 4: Aggregated slope classes with respect to potential selection of dumping site

S.No.	Slope (Degree)	Rank
1	Less than 2	3
2	2 to 5	2
3	5 to 10	1
4	10 to 15	4
5	Greater than 15	0

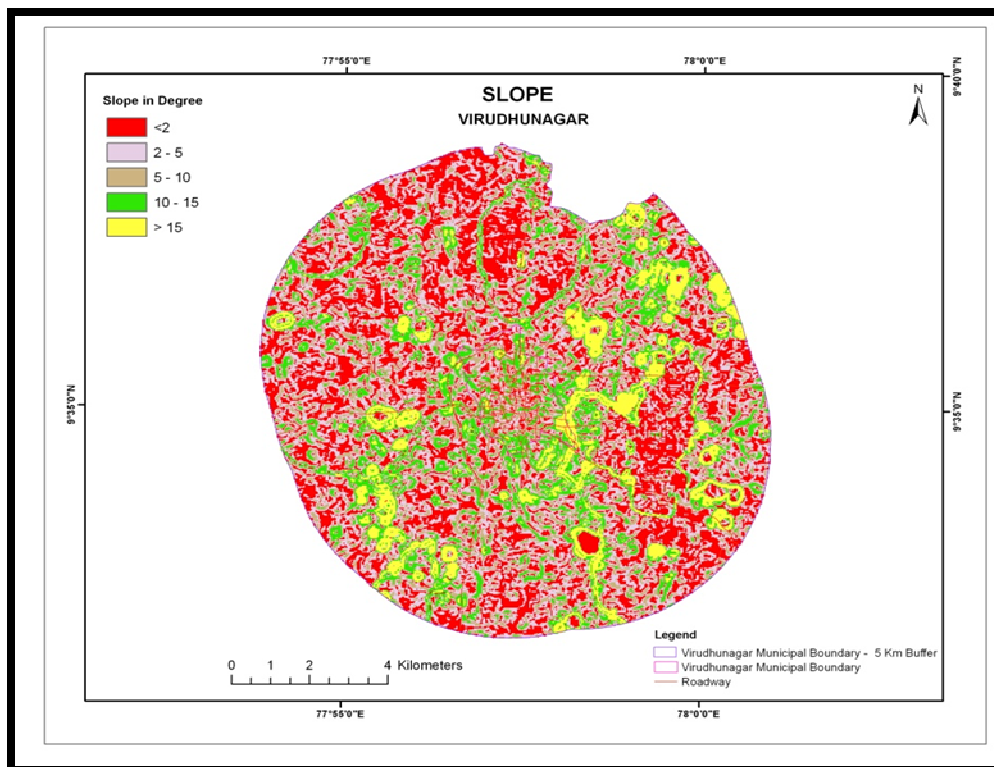


Figure 4: The Slope map of Virudhunagar Municipality with 5 km buffer

4.5 Soil

Soils in the Virudhunagar District have been classified into i) Alfisols red Loam ii) Enti iii) Red sandy soil. The majority of the study area was covered by Black soil (Fig 6). Ferruginous red soils were also seen at places. Black soils were deep to very deep and generally occur in the depressions adjacent to hilly areas, in the western and central part of district. Alluvial soils occur along the river courses.

Table 5: Aggregated Classes of Dumping Site Potential with respect to Virudhunagar District

Soil	Rank	area	Percentage
Alfisols	3	885.9361	20.92
Entisols	4	185.5053	4.38
Forest unsurvey	0	2.6395	0.06
Hill soil	0	269.2155	6.36

Inceptisols	2	876.6314	20.70
Reserve forest	0	11.6218	0.27
Vertisols	1	2002.5400	47.30
Total		4234.0896	

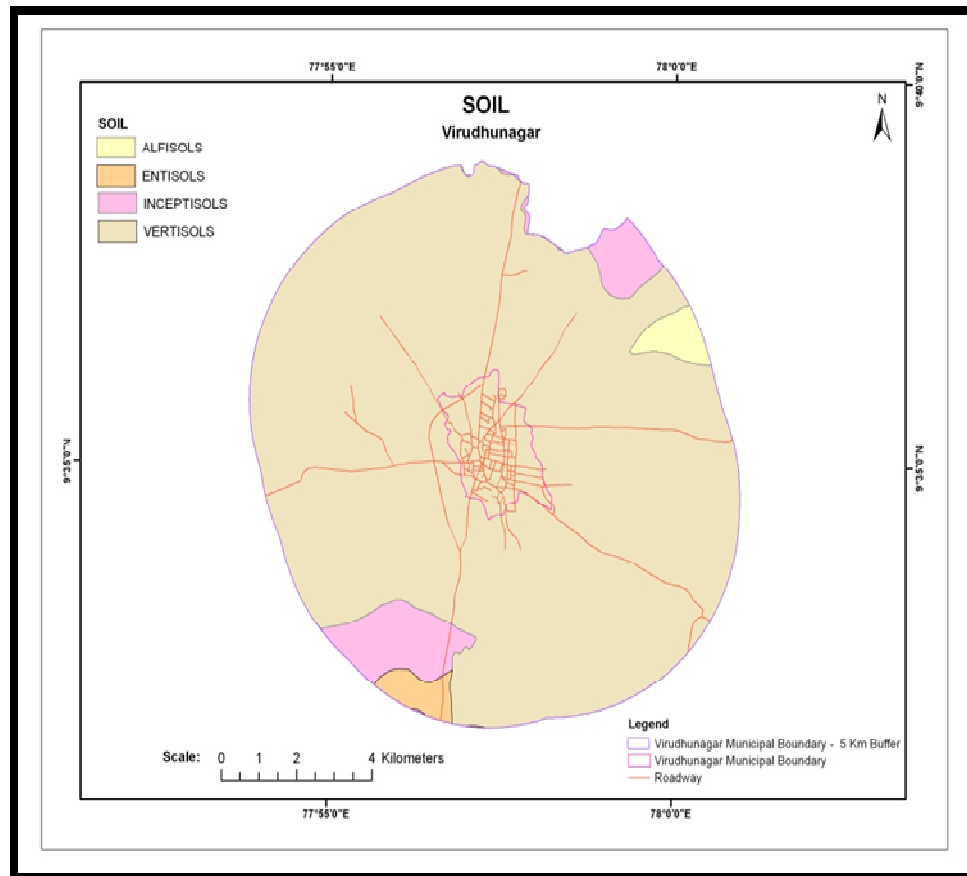


Figure 5: The soil map of Virudhunagar Municipality with 5 km buffer

4.6 Land use of Virudhunagar District:

The major land use features observed in Virudhunagar District were Crop land and Land with scrub, occupying about 1929.8sq.km and 695.9sq.km area respectively. Virudhunagar District crop lands, lands with scrub and water bodies were the major land use/cover identified. Virudhunagar area was fully depend on agricultural land so selection of dumping site locations was critical to identify optimum location with proper network facility and above explained geological, geomorphological, land use features criteria. The rank for the different classes has been given after thoroughly studied the study area with suitable recent techniques and field knowledge.

Table 6: Aggregated areas of land use / land covers features of Virudhunagar District

Landuse	Rank	Area	Percentage
Abandoned quarries water	0	1.2712	0.03
Barren Rocky/ Stony Waste	2	3.7189	0.09
Canal	0	6.6309	0.16
Crop Land in Forest	0	0.0600	0.00

Identification of suitable site for urban solid waste disposal using GIS and remote sensing techniques. A case study of Virudhunagar municipality, India
Suresh B, Sivasankar S.

Crop land	6	1929.8691	45.58
Deciduous (Moist/Dry)	0	265.2108	6.26
Fallow	4	290.5661	6.86
Forest Plantations	0	4.9145	0.12
Lakes/Ponds	0	3.9304	0.09
Land with scrub	6	695.9891	16.44
Land without scrub	3	176.6433	4.17
Mining process	5	5.7820	0.14
Plantations	0	366.2378	8.65
Reservoirs	0	0.5307	0.01
River	0	32.7717	0.77
Salt Affected Land	1	23.8723	0.56
Tanks	0	276.7228	6.54
Towns/cities (Urban)	0	64.3621	1.52
Villages (Rural)	0	85.0865	2.01
Total		4234.1702	

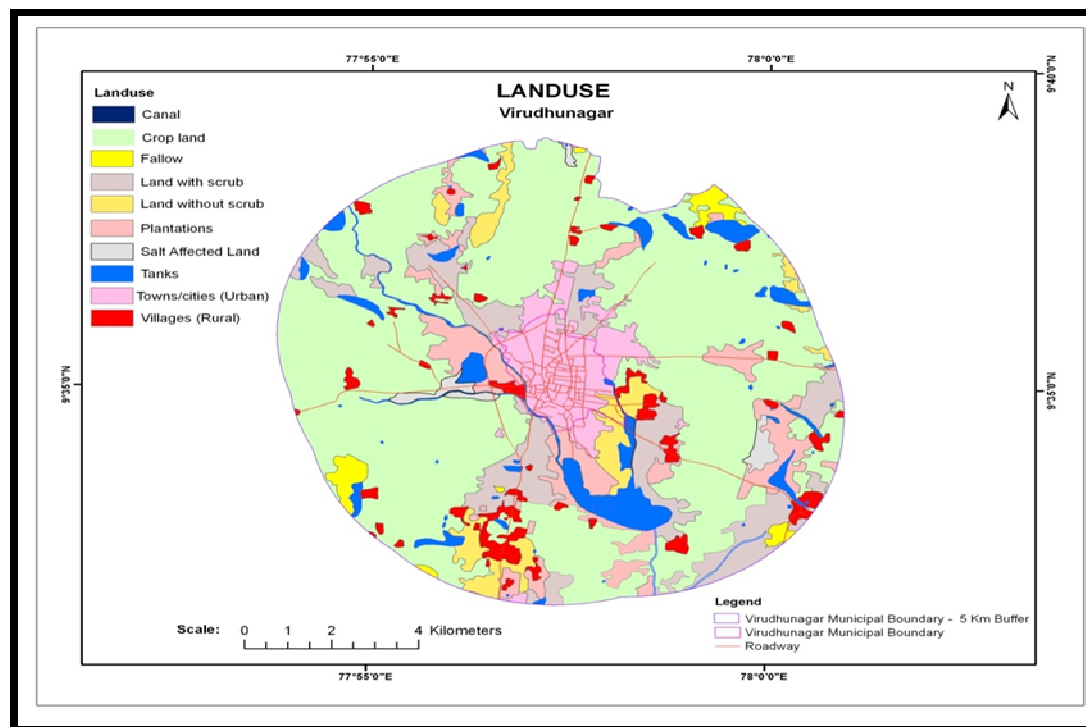


Figure 6: Landuse / land cover map of Virudhunagar Municipality with 5 km buffer.

4.7 Result of weighted overlay analysis

Weighted Overlay was a technique for applying a common measurement scale of values to diverse and dissimilar inputs to create an integrated analysis. Based on different thematic layers possible location for waste disposal sites have been identified. For the present study using weighted overlay of each layer, viz., geology, geomorphology, soil, slope, landuse, and actual field data, suitable site sensitivity index was arrived. Weightage was assigned to

different thematic layers based on their significance in deciding the site suitability. The value of site sensitivity index when multiplied by the corresponding weightage, results in a score or rank (ranging from 1 to 4) indicating the site suitability.

The top ranking 17 parameters were short-listed and weightage of attributes (W_i) were assigned based on the pair wise comparison method (Canter, 1996) such that the total weightage was 1000. Each attribute was measured in terms of a sensitivity index (S_i) on scale of 0-1 (0.0-0.25, 0.25-0.5, 0.5-0.75, 0.75-1.0) to facilitate computation of cumulative scores called Risk Index (RI) that can be used for short listing of landfill sites. While “0” indicated potential site. “1” indicated the low potential site. Allotment of sensitivity indices for the selected parameters was made following earlier studies (Saxena and Bhardwaj, 2003). The RI of the site was calculated using the following formula:

$$RI = \sum_{i=1}^n W_i S_i$$

Where

W_i = Weightage of the with variable ranging from 0- 1000

S_i = Sensitive index of the i 'th variable ranging from 0- 1

RI = Risk Index variable from 0-1000

Based on availability of field data, this attribute can be graded on the four levels of scales for the particular site and total of 1000 points were divided among the four criteria such as Accessibility, Receptor, Environmental and Geological related attributed 100, 200, 300, 400, respectively using Delphi approach. The value of the sensitivity index multiplied by the corresponding weightage value would give risk index score for each parameter. Similarly scores were calculated for all parameters to get the final score for site selection. Comparisons of score were done for all sites and least score sites has considered as ideal site for dumping yard. The total scores (out of 1000) can be interpreted in terms of the sensitivity of the site as follows.

Rank 1 – Highly Suitable (Score below 300)

Rank 2 – Suitable (Score between 300 to 450)

Rank 3 – Moderately Suitable (Score between 450-600)

Rank 4 – Least Suitable and (between 600-750)

Not suitable area was given a white colour in the maps

deciding the site suitability. The value of site sensitivity index when multiplied by the corresponding weightage, results in a score or rank (ranging from 1 to 4) indicating the site suitability.

5. Conclusion

In the present study as result of the multi criteria overlay analysis the following suitable locations for solid waste disposal were suggested for Virudhunagar municipality. The accuracy of the proposed sites was directly related to the number of data layers considered for analysis. Each data layer was to be judged with respect to environmental, social and community impact and due weightages need was assigned before taking any decision.

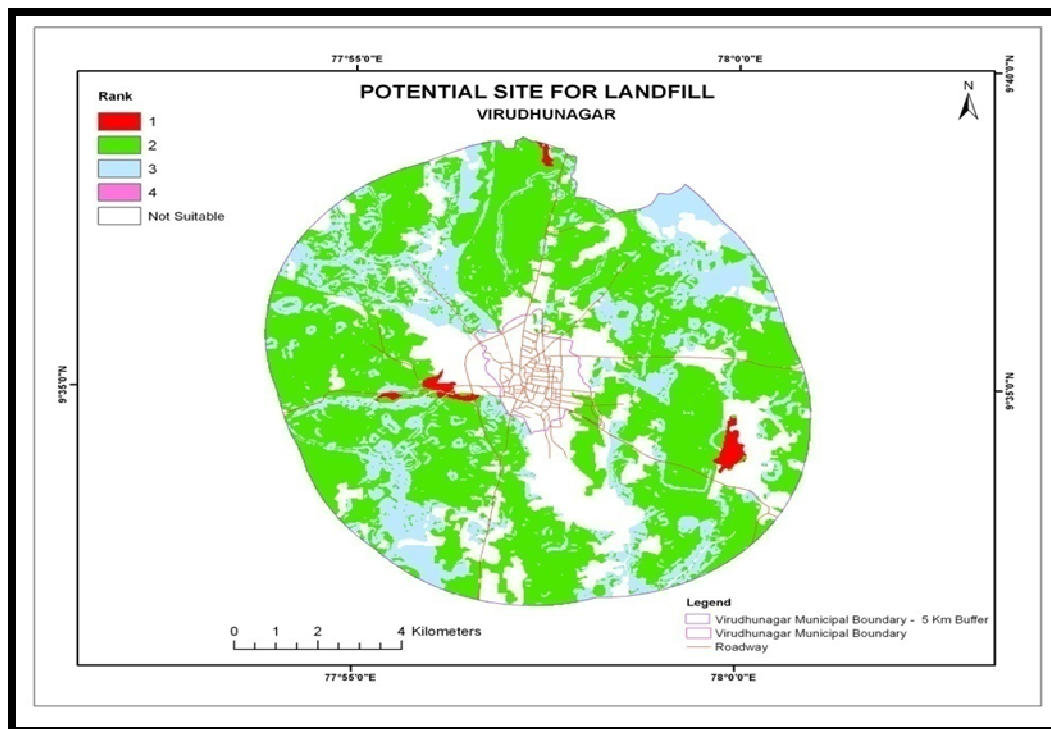


Figure 7: Suitable waste disposal sites in Virudhunager District

Weightage was assigned to different thematic layers based on their significance in

As a result of the study a number of thematic layers were generated and used for multi criteria analysis. In Virudhunagar, suitable locations were found very near to municipal area however, area at far north and south west were most suitable and ranked 1 while rank 2 locations were spread across and in all directions in this municipality area. Geographic Information System combined with Remote sensing techniques were most suitable tools to address problems related to spatial dimension, one like finding suitable location for solid waste disposal. GIS as an information tool, has helped in the acquisition of recent land use information and geomorphologic data. With further analysis on the data, our administrators can solve many issues like identifying a suitable site for waste disposal. Thus with the use of these technologies management of municipal waste will no longer be a problem for city administrators.

6. References

1. Akbari, V., Rajabi, M.A., Chavoshi, S.H., and Shams,R., 2008. Landfill site selection by combining GIS and fuzzy multi criteria decision analysis, Case study: Bandar Abbas, Iran. World Applied Sciences Journal,3, pp 39-47
2. Basagaoglu, H. et.al. (1997), Selection of Waste Disposal Sites Using GIS, Journal of the American Water Resources Association, 33(2), pp 455–464.
3. Caisni, m., Mocenni,C., Paoletti,S., and Pranzo, M., (2006), A model-besd DSS with application to the management and control of coastal lagoons. 45th IEEE conference on Decision and Control, Stockholm, Sweden, 26-28 September.

4. Din, M.A., Jaafar, W.Z.w., Obot, M.M., and Hussin, W.M.A.w., (2008), How GIS can be useful tool to deal with landfill site selection. International symposium on Geoinformatics for spatial infrastructure development in Earth and Allied sciences. 5-7th May.
5. Kao, J.J & Lin, H.Y., (1996), Multifactor spatial analysis for landfill sitting, Journal Environmental Engineering 122(10), pp 902-908.
6. Kontos, T.D., koilis, D.P and Halvadakis, C.P., (2005), Siting MSW landfills with a spatial multiple criteria analysis methodology. Journal of waste management 25, pp 818-832.
7. Sener, B., (2004), Landfill site selection by using geographical information system, MSc. Thesis Graduate School of Natural and Applied Sciences, Middle East technical University.
8. Shamshiry, E., Nadi, B., Mokhtar, M.B., Komoo, I and Hasmi, H.S Urban solid waste management based on geoinformatics technology, 2011, Journal of Public Health and Epidemiology, 3(2), pp 54-60.