SKUAST Journal of Research 26(2): 227-235; (2024)
(DOI No: *10.5958/2349-297X.2024.00030.3*); NASS rating: 4.88

Research Paper

Drying kinetics modelling of refractance window dried bitter-gourd

Shabahat Ali[1]*, Insha Rashid Narwari[2] and Shahzad Faisal [3]

College of Agricultural Engineering and Technology, Sher-e-Kashmir University of Agricultural Sciences and Technology of Kashmir, Shalimar Srinagar, 190025
*e-mail: *mirshabahat284@gmail.com*

(Received October 16 2023; accepted January 20, 2024)

www.IndianJournals.com
Not for Commercial Use
Downloaded From IP - 216.73.216.75 on dated 18-Nov-2026

ABSTRACT

This research aimed to examine the drying kinetics of bitter gourd slices in a Refractance Window Dryer. The study investigated the drying time, dehydration ratio, and color change of the samples while considering water temperature (70, 80, and 90°C), sample size (1, 2, and 3 mm), and blanching times (2, 3, and 4 min). A total of 18 experimental runs were conducted following the Box Behnken design. Various mathematical models, including exponential, Henderson and Pabis, Page's, and Power law models, were applied to the kinetics data of bitter gourd's Refractance window drying, and their suitability was evaluated. The best amongst these models was selected as per the higher value for co-efficient of determination (R^2), and lowest standard error of estimation (SEE) values. Page's model demonstrated a good fit to all the experimental drying data, exhibiting higher R^2 (0.9955) value compared to the other three models.

Key words: Bitter gourd, box behnken design, mathematical models, refractance window dryer

Bitter gourd (*Momordica charantia* L.), often known as Karela, is consumed throughout the Asian subcontinent for its culinary and therapeutic benefits (Ünal *et al.,* 2013). It is both nutritious and energetic. It is a tropical and subtropical vine with numerous medicinal properties. It's also utilised to complement vitamins, minerals, bioactive chemicals, and antioxidants. It contains DPPH (2, 2, diphenyl picrylhydrazyl), TPC (total phenolic compound), and ferric reducing antioxidant compounds (Budrat and Shotipruk, 2008; Myojin *et al.,* 2008).

However, due to its seasonal nature, it is necessary to preserve bitter gourd to enjoy its therapeutic benefits throughout the year. Traditional preservation methods often involve drying, but this can lead to a reduction in the vegetable's nutritional content and damage its flavor, color, and bioactive compounds. To overcome these challenges, researchers have developed new and improved drying techniques, such as Refractance Window Drying (RWD), which has gained popularity recently.

MCD Technologies Inc. (Tacoma, Washington, USA) invented refractance window drying (RWD) technology, which is a new and emerging technology (Ocoro-Zamora and Ayala-Aponte, 2013; Topuz *et al.,* 2009). It is a one-of-a-kind fourth-generation drying method that offers better outcomes in terms of energy consumption, product quality, environmental impact, dehydration cost, safety, and productivity.

Using mathematical models is crucial for simulating and validating the drying process (Sabarez *et al.,* 2015). Mathematical modeling, encompassing thin-layer modeling, serves a crucial role, not just in describing experimental data, but also in optimizing the drying process (Onwude *et al.,* 2016). The goal of our research is to analyze the kinetics and to provide valuable insights into optimizing the drying conditions, enhancing energy efficiency, and preserving the quality of the dried bitter gourd.

Understanding Refractance window drying: Refractance window drying (RWD), a variant of Cast-Tape Drying (Zotarelli *et al.,* 2017), incorporates the use of hot water as a heat transfer medium while maintaining a temperature below boiling point (Hashem HA *et al.,* 2019; Rostami H, *et al.,* 2018).

A basic refractance window dryer involves components like a stainless steel frame, conveyor belt, hot water pump, water tank, and heating unit (Fig.1). Hot water, circulating at around 95-97°C, transfers thermal energy to the moist material spread thinly on the conveyor belt, enabling rapid drying through convection, conduction, and radiation (Akinola AA and Ezeorah SN, 2016). The cooled section of the belt prevents product adhesion, simplifying removal (Azizi *et al.,* 2017). This method is quick and operates at moderate temperatures (Jalgaonkar *et al.,* 2020).

Refractance window drying stands out for its energy efficiency, enhancing both the efficiency and effectiveness of the drying process (Raghavi *et al.,* 2018). Particularly beneficial for heat-sensitive items like juices and purees, this method preserves the product's color, aroma, antioxidants, and nutritional qualities (Ochoa-Martínez *et al.,* 2012).

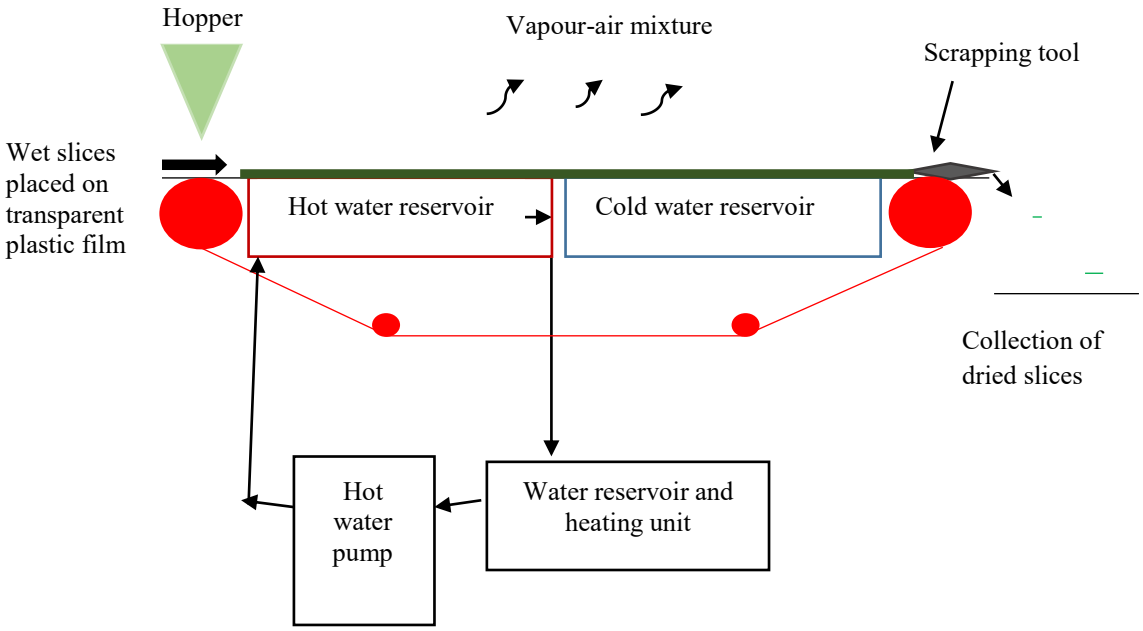


Fig. 1: Diagram illustrating components of refractance window dryer adapted from Zalpouri *et al.*, 2022 with some modifications

MATERIALS AND METHODS

Sample Preparation and drying unit: Fresh and high quality bitter-gourds were sourced from the local market of downtown area Srinagar, cleaned and washed thoroughly. Drying experiment was performed using laboratory-scale water-bath that served as a batch-type refractance window dryer in Food Processing Laboratory of College of Agricultural Engineering and Technology, Sher-e-Kashmir University of Agricultural Sciences and Technology, Shalimar, Srinagar (J&K), Fig. 2. Bitter gourds were sliced as per the experimental levels (1, 2 and 3 mm). The blanching temperature was consistently maintained at the boiling point of water, 100°C, for all selected durations following the standard hot water blanching method, Fig.3. The blanched slices were spread over the polyethylene film resting on the water bath (Fig. 4), where the polyethylene film temperature matched the water temperature, ensuring uniformity across different temperature levels.



Fig.2: Water bath used as refractance window dryer

www.IndianJournals.com
Not for Commercial Use
Downloaded From IP - 216.73.216.75 on dated 18-Nov-2026

Polyethylene is a thermoplastic polymer that has excellent thermal properties, including low thermal conductivity and high melting point. It is a good insulator and can withstand a wide range of temperatures, making it suitable for various applications, including packaging, pipes, and insulation (Lailun*, et al.,* 2009). It has also been reported that a polyethylene film demonstrates excellent refractance window drying properties, contributing significantly to the effectiveness of RWD process while being cost-effective (Ali, *et al.,* 2024).

The water temperature (70, 80, and 90°C), slice thickness (1, 2, and 3 mm), and blanching times (2, 3, and 4 min) was set according to different experimental runs of Box Behnken design. The samples were drawn at regular intervals of 5 min / 10 min until the moisture content was reduced below 10 (% db.), which is considered safe for storage (Pandey, 2000). The material was removed after the drying process and packaged in zip-lock plastic pouches and safely stored in the desiccator, Fig.5.



Fig.3: Hot water blanching using laboratory hot plate



Fig.4: Blanched slices resting over the Polyethylene film



Fig. 5: Dried slices stored safely in a dessicator



Fig.6: Infrared moisture meter

Analytical Procedure for studying drying behavior of bitter gourd

Determination of moisture content: Moisture content of bitter gourd was first determined using an infrared moisture meter from Toshiba India Limited and checked with the hot air oven method. The infrared moisture meter is a semi-automatic moisture meter (Fig.6) that directly reports moisture content on a wet basis. Samples were weighed on an infrared moisture balance. The moisture content was read after about 15 minutes and it was observed that moisture content reading becomes constant in this duration. Weight differential was converted into corresponding moisture loss for calculating moisture content using the following equation:

www.IndianJournals.com
Not for Commercial Use
Downloaded From IP - 216.73.216.75 on dated 18-Nov-2026

$$\text{Moisture content (\% db.)} = \frac{W_s - W_d}{W_d} \quad \ldots\ldots\ldots\ldots\ldots\ldots\ldots\ldots \quad (1)$$

where,

W_s = Weight of the sample (g)
W_d = Bone dry Weight of sample (g)

The initial moisture content of bitter gourd ranged from 1234.15 to 1011.1 (% db.), equivalent to 92.5 to 91 (% wb.). It was observed that the time required to bring the moisture content to a safe limit (≤ 10%) ranged from 50 to 130 minutes across the different experimental conditions.

Determination of moisture ratio: Moisture ratio (MR) was determined using the following equation (Brooker *et al.,* 1997).

$$MR = \left[\frac{M - M_e}{M_o - M_e}\right] \times 100 \quad \ldots\ldots\ldots\ldots\ldots\ldots\ldots\ldots\ldots\ldots\ldots\ldots \quad (2)$$

where,

M = Moisture content of sample at any time of drying (%db)
M_e = Equilibrium moisture content attained (%db)
M_o = Initial moisture content of sample (%db)

Determination of drying rate: The rate of drying was calculated by the decrease in moisture content (% db.) of the bitter-gourd sample per unit time (min), as determined by the following equation (Brooker *et al.,* 1997).

$$\frac{dM_{i+1}}{dt_{i+1}} = \left[\frac{M_i - M_{i+1}}{t_{i+1} - t_i}\right] \quad \ldots\ldots\ldots\ldots\ldots\ldots\ldots\ldots\ldots\ldots\ldots\ldots \quad (3)$$

where,

$\frac{dM_{i+1}}{dt_{i+1}}$ = drying rate, loss of moisture per min, at i^{th} drying time (% db.)
M_i = Moisture content at i^{th} time interval
i = Drying interval

Determination of equilibrium moisture content: The equilibrium moisture content of the bitter-gourd slice was tried at 1 and 2% less than final moisture content obtained during the experiment as suggested by (Goyal,2002; Faisal,2013).

Determination of dehydration ratio: Determination of the dehydration ratio was carried out by the procedure mentioned by Sebii *et al.,* (2020). The known sample weight was dried, and the dried sample weight was recorded. By using the following formula, the dehydration ratio is calculated:

$$\text{Dehydration Ratio (DR)} = \frac{\text{Weight of product prior to drying}}{\text{Weight of dried product}} \quad \ldots\ldots\ldots \quad (4)$$

In the realm of food drying, the dehydration ratio holds significant importance. It serves as a metric indicating the efficiency of water removal from food samples throughout the drying process.

Process Modelling using Mathematical Models: Process dynamics were investigated using temperature independent and moisture dependent parameters such drying time, drying rate, and moisture ratio. Various models related to these variables were studied and mathematical relationships were developed. The experimental data was fitted in different drying models to see their feasibility to characterize the drying behavior of bitter gourd in refractance window drying. The experimental moisture ratio (MR) determined using equation (2) was fitted to these four mathematical models (Table 1) Using the statistical program, Non-Linear Regression Analysis NLREG Version 4.1, the coefficients and the constants of the model were predicted.

The selection of the best-fitting equation was based on the statistical indicators R^2 and SEE. R^2, a measure of data closeness to the regression line, was used to assess how well the data aligned with the fitted model. The choice of the most suitable model for agricultural produce drying kinetics depended on the R^2 value (Jackis *et al.,* 2018; Mphahlele *et al.,* 2019). The model that has highest coefficient of determination (R^2), is considered as the most relevant model (Hashim *et al.,* 2014; Onwude *et al.,* 2016a). Additionally, SEE, another statistical parameter, was employed to measures the dispersion of actual data points around the regression line,

www.IndianJournals.com
Not for Commercial Use
Downloaded From IP - 216.73.216.75 on dated 18-Nov-2026

providing insight into the model's reliability in estimating future values. A lower SEE indicates a better fit of the model to the data, suggesting higher accuracy in predicting drying behavior (Jackis *et al.,* 2018).

Table 1. Mathematical models used to study the drying behaviour of RW dried bitter gourd

S. No.	Model name	Model
1.	Page Model	$MR= \exp(-kt^n)$
2.	Exponential Model	$MR= \exp(-kt)$
3.	Henderson and Pabis Model	$MR= a*\exp(-kt)$
4.	Power Law Model	$MR= a*t^b$

where:

MR = Moisture ratio; t: Drying time (min);
k: Drying constant (min^{-1}); a, b, n: empirical constants in drying model.

RESULTS AND DISCUSSION

Experiments were conducted to characterize the drying behavior of bitter gourd slices. The effect of temperature and blanching time on drying behavior of 1mm, 2mm and 3mm slices of bitter gourd were investigated on different responses. The drying of bitter gourd slices followed falling rate period only. The drying time ranged from 50 to 130 minutes, with the shortest duration recorded at 90°C with 1 mm slice thickness and 3 minutes blanching time. The longest drying time was 130 minutes, occurring at 70°C with 3 mm slice thickness and 3 minutes blanching time. Dehydration ratios ranged from 6.8 to 9.7, with the lowest ratio at 70°C and the highest at 90°C. Color changes ranged from 51.256 to 63.335, being minimal at 70°C for 1 mm slices and maximal at 90°C for 3 mm slices. Various mathematical models were fitted to the kinetics data of refractance window drying of bitter gourd and adequacy of fit was investigated.

Mathematical models for predicting drying behavior of bitter gourd

Exponential model: Drying and statistical parameters obtained from Exponential model are shown in **Table 2**

Table 2: Drying and statistical parameters of Exponential model (MR= exp(-kt))

Experiment No.	Drying Parameters	Statistical Parameters	
	k	R^2	SEE
1	0.090596236	0.9927	0.028013
2	0.067498604	0.9959	0.0224465
3	0.038560991	0.9952	0.0234961
4	0.029052159	0.9939	0.0262502
5	0.035979399	0.9917	0.0323291
6	0.027365763	0.9906	0.0333936
7	0.0531129	0.9961	0.0200098
8	0.05383007	0.9961	0.0203955
9	0.052472385	0.9976	0.0157353
10	0.074934484	0.9962	0.0220999
11	0.035067142	0.9949	0.0227525
12	0.024825159	0.9933	0.0268643
13	0.026287154	0.9846	0.0423654
14	0.055496402	0.9881	0.0342975
15	0.024223777	0.9876	0.0366797
16	0.028363183	0.9927	0.0283065
17	0.027002267	0.9832	0.0447773
18	0.029266358	0.9902	0.0338691
Average values	**0.042996357**	**0.992256**	**0.028560072**

www.IndianJournals.com Not for Commercial Use Downloaded From IP - 216.73.216.75 on dated 18-Nov-2026

Henderson and Pabis Model: Drying and statistical parameters obtained from Henderson and Pabis model are shown in **Table 3**

Table 3: Drying and statistical parameters of Henderson and Pabis Model {MR= a*exp (-kt)}

Experiment No.	Drying Parameters		Statistical Parameters	
	k	a	R^2	SEE
1	0.087831	0.972403	0.9937	0.027801
2	0.069049	1.021807	0.9965	0.022096
3	0.039396	1.019115	0.9956	0.023332
4	0.028928	0.996227	0.9939	0.027131
5	0.03726	1.031796	0.9929	0.03112
6	0.028018	1.020972	0.9912	0.033565
7	0.051572	0.97614	0.9968	0.019051
8	0.05238	0.97775	0.9967	0.019681
9	0.051114	0.978473	0.9982	0.014463
10	0.075935	1.012837	0.9964	0.023132
11	0.033645	0.966238	0.9963	0.02004
12	0.024804	0.999268	0.9933	0.027959
13	0.026992	1.024849	0.9855	0.042689
14	0.05192	0.947905	0.9916	0.030263
15	0.024591	1.012658	0.9879	0.03786
16	0.028349	0.999567	0.9927	0.029462
17	0.027792	1.027349	0.9842	0.045024
18	0.029933	1.019541	0.9908	0.034328
Average values	**0.04275**	**1.000272**	**0.993011**	**0.028278**

Page model: Drying and statistical parameters obtained from Page model are shown in **Table 4.**

Table 4: Drying and statistical parameters of Page model {MR= exp ($-kt^n$)}

Experiment No.	Drying Parameters		Statistical Parameters	
	k	n	R^2	SEE
1	0.14154408	0.825664	0.9992	0.009677
2	0.04423081	1.15306	0.9994	0.008791
3	0.02620641	1.116067	0.9978	0.016634
4	0.0239473	1.052495	0.9946	0.025571
5	0.0211249	1.156063	0.997	0.020306
6	0.01712776	1.126506	0.9942	0.026257
7	0.07058573	0.905812	0.9984	0.013423
8	0.07044095	0.91043	0.9982	0.014544
9	0.06609524	0.923803	0.999	0.010455
10	0.05618288	1.107143	0.9983	0.016065
11	0.04505213	0.928116	0.9965	0.019637
12	0.02194119	1.032647	0.9936	0.027266
13	0.0147619	1.151874	0.9904	0.034716
14	0.09224226	0.830914	0.9966	0.01913
15	0.01661479	1.099862	0.9905	0.033604
16	0.02599953	1.023655	0.9929	0.029109
17	0.01450946	1.164344	0.9898	0.036267
18	0.02078146	1.094655	0.9927	0.030573
Average values	**0.04385493**	**1.033506**	**0.995506**	**0.021779**

www.IndianJournals.com
Not for Commercial Use
Downloaded From IP - 216.73.216.75 on dated 18-Nov-2026

Power Law model: Drying and statistical parameters obtained from Power Law model are shown in Table 5.

Table 5: Drying and statistical parameters of Power Law model {MR= a*t^b}

Experiment No.	Drying Parameters		Statistical Parameters	
	a	b	R^2	SEE
1	2.69481405	-0.920205022	0.9378	0.055011
2	3.66274176	-0.942573986	0.9127	0.085149
3	3.15833473	-0.741498301	0.8581	0.113647
4	2.75334433	-0.627340552	0.8243	0.127757
5	3.08307762	-0.706293654	0.8514	0.12485
6	2.72193998	-0.60504948	0.8261	0.134289
7	2.98549906	-0.803584739	0.9143	0.076226
8	2.92407002	-0.794745555	0.9156	0.076846
9	2.94905515	-0.794917589	0.9054	0.08081
10	3.40551119	-0.940413556	0.9121	0.085553
11	2.75679263	-0.682565617	0.8634	0.102765
12	2.49793006	-0.55699361	0.8425	0.121049
13	2.7485106	-0.603468401	0.8102	0.139299
14	2.48364137	-0.745505806	0.8859	0.083136
15	2.43091454	-0.535355525	0.8207	0.132476
16	2.65498386	-0.606428557	0.8521	0.117073
17	2.8019961	-0.616109546	0.8072	0.141628
18	2.73708528	-0.616064038	0.8458	0.125521
Average values	**2.858346796**	**-0.713284085**	**0.865867**	**0.106838**

Selection of best fitted model: Various drying models (Exponential, Henderson and Pabis, Page's Model and Power law model) were fitted to the experimental data using Non Linear Regression technique and the applicability of all four models was done on the basis of coefficient of determination (R^2). The best fitted model was selected on the basis of higher R^2. Page's model fitted well to all the experimental drying data as it yielded highest R^2 (0.9955) and values compared to other three models (Table 6).

Table 6: Average value of coefficient of determination and standard error of estimation of various mathematical models

Models	Constants	R^2	SEE
Page Model	k = 0.04385493 n = 1.033506	0.995506	0.021779
Exponential Model	k = 0.042996357	0.992256	0.028560072
Henderson and Pabis Model	k = 0.04275 a = 1.000272	0.993011	0.028278
Power Law Model	a = 2.858346796 b = -0.713284085	0.865867	0.106838

CONCLUSION

The drying kinetics of bitter gourd were analysed with selected four mathematical models namely Exponential, Henderson and Pabis, Page's Model, and Power law model. The goodness of fit of model was tested using R^2 mainly. Among all the models, Page model described the best drying characteristics of bitter gourd. Page's model fitted well to all the experimental drying data as it yielded higher R^2 (0.9955) compared to other three models. Additionally, it showcased a lower Standard Error of Estimation (SEE) at 0.0217. Although this SEE value was not the lowest among the models tested, it still falls within an acceptable range, indicating a reasonable level of accuracy.

www.IndianJournals.com
Not for Commercial Use
Downloaded From IP - 216.73.216.75 on dated 18-Nov-2026

REFERENCES

Akinola, A. A., and Ezeorah, S. N. 2016. Dehydration studies of root tubers using a refractance window dryer. In *20th International Drying Symposium, Nagaragawa Convention Centre, Gifu, Japan* (pp. 07-10).

Ali, S., Narwari, I.R. and Faisal, S., 2024. Response Surface Optimization of Refractance Window Drying of Bitter Gourd Slices. *Journal of Agricultural Engineering (India)*, **61:** pp.52-66.

Azizi, D., Jafari, S. M., Mirzaei, H., and Dehnad, D. 2017. The influence of refractance window drying on qualitative properties of kiwifruit slices. *International Journal of Food Engineering*, **13:** 20160201.

Brooker, D.B., Bakker-Arkema, F.W. and Hall, C.W., 1997. Drying of Cereal Grains. *AVI Publishing Co. Inc.*

Budrat, P. and Shotipruk, A., 2008. Extraction of phenolic compounds from fruits of Bitter melon (Momordica charantia) with subcritical water extraction and antioxidant activities of these extracts. *Chiang Mai Journal of Science,* **35(1):** pp.123-130.

Faisal, S., Tabassum, R. and Kumar, V., 2013. Performance evaluation and process optimization of potato drying using hot air oven. *Journal of Food Processing and Technology*, **4:** pp.2-9.

Goyal, N., 2002. Optimization of two stage drying process for drying and storage behavior of Potato cubes. *Thesis, M.Tech, G.B. Pant University of Agriculture and Technology, Pantnagar.*

Hashem, H. A., Tayel, S. A., Younes, O. S., and Mageed, A. O. A. 2019. Effect of refractance-window drying method on quality characteristics of balady menthol. *J Food Dairy Sci*, **10**: 265-269.

Hashim, N., Daniel, O., and Rahaman, E. 2014. A preliminary study: kinetic model of drying process of Pumpkins (Cucurbita moschata) in a convective hot air dryer. *Agriculture and Agricultural Science Procedia*, **2**: 345-352.

Jackis, A., Muvengei, M., Hiram, N., and Calvin, O. 2018. Modeling of thin layer drying kinetics of maize in hybrid solar biomass dryer. *Int. J. Sci. Eng. Technol. Res*, **7**: 643-650.

Jalgaonkar, K., Mahawar, M. K., Vishwakarma, R. K., Shivhare, U. S., and Nambi, V. E. 2020. Optimization of process condition for preparation of sapota bar using Refractance window drying method. *Drying Technology*, **38**: 269-278.

Lailun Y, Atmaja L, Juwono H. 2009.Synthesis and characterization of HDPE plastic film for herbicide container using fly ash class f as filler Indonesian. J Chem. **9(3)**: 348–54.

Mphahlele, R. R., Pathare, P. B., and Opara, U. L. 2019. Drying kinetics of pomegranate fruit peel (cv. Wonderful). *Scientific African*, **5**: e00145.

Myojin, C., Enami, N., Nagata, A., Yamaguchi, T., Takamura, H. and Matoba, T., 2008. Changes in the radical-scavenging activity of Bitter gourd (Momordica charantia L.) during freezing and frozen storage with or without blanching. *Journal of food science*, **73**: pp.C546-C550.

Ochoa-Martínez, C.I., Quintero, P.T., Ayala, A.A. and Ortiz, M.J., 2012. Drying characteristics of mango slices using the Refractance Window™ technique. *Journal of Food engineering*, **109**: pp.69-75.

Ocoro-Zamora and Ayala-Aponte, 2013. Influence of thickness on the drying of papaya puree (*Carica papaya* L.) through Refractance Windows™ technology. *Dyna,* **80:** pp. 147-154.

Onwude, D.I.; Hashim, N.; Janius, R.B.; Nawi, N.M.; Abdan, K. 2016. Modeling the thin-layer drying of fruits and vegetables: A review. *Compr. Rev. Food Sci. Food Saf.* **15**: 599–618.

Pandey H., 2000. Optimization of process parameter of dehydration of cauliflower. *Doctoral dissertation, Thesis, M. Tech., GB Pant University of Agriculture and Technology, Pantnagar, India*.

Rostami, H., Dehnad, D., Jafari, S. M., and Tavakoli, H. R. 2018. Evaluation of physical, rheological, microbial, and organoleptic properties of meat powder produced by Refractance Window drying. *Drying technology*, **36(9)**: 1076-1085.

Raghavi, L. M., Moses, J. A., and Anandharamakrishnan, C. 2018. Refractance window drying of foods: A review. *Journal of food engineering*, **222**: 267-275.

Sabarez, H. T. 2015. Modelling of drying processes for food materials. In Modeling food processing operations (pp. 95-127). Woodhead Publishing.

Sebii, B.m, Bouaziz, M.A., Ettaib, R., H., Danthine, S., Blecker,c., and Attia, H., 2020. The procedure for Determination of Dehydration Ratio. *Food Processing and Technology.*

Topuz, A., Feng, H. and Kushad, M., 2009. The effect of drying method and storage on color characteristics of paprika. *LWT-Food Science and Technology*, **42:** pp.1667-1673.

Ünal, H., Alpsoy, H.C. and Ayhan, A. 2013. Effect of the moisture content on the physical properties of bitter gourd seed.

Zotarelli, M. F., da Silva, V. M., Durigon, A., Hubinger, M. D., and Laurindo, J. B. 2017. Production of mango powder by spray drying and cast-tape drying. *Powder technology*, **305**: 447-454.

www.IndianJournals.com
Not for Commercial Use
Downloaded From IP - 216.73.216.75 on dated 18-Nov-2026